

# **Intelligent Automation Incorporated**

## **Coherent distributed radar for high-resolution through-wall imaging**

### **Progress Report 24**

**Contract No. N00014-10-C-0277**

*Sponsored by*

Office of Naval Research

COTR/TPOC: Martin Kruger



**Prepared by**

Eric van Doorn, Ph.D. (PI)

Satya Ponnaluri, Ph.D.

Distribution Statement A: Approved for public release; distribution unlimited.

<b>Report Documentation Page</b>			Form Approved OMB No. 0704-0188	
<p>Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p>				
1. REPORT DATE <b>MAR 2012</b>	2. REPORT TYPE	3. DATES COVERED <b>00-00-2012 to 00-00-2012</b>		
4. TITLE AND SUBTITLE <b>Coherent Distributed Radar For High-Resolution Through-Wall Imaging</b>			5a. CONTRACT NUMBER	
			5b. GRANT NUMBER	
			5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)			5d. PROJECT NUMBER	
			5e. TASK NUMBER	
			5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Intelligent Automation Incorporated, 15400 Calhoun Drive, Suite 400, Rockville, MD, 20855</b>			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)	
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>				
13. SUPPLEMENTARY NOTES				
14. ABSTRACT				
15. SUBJECT TERMS				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>4</b>
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>	19a. NAME OF RESPONSIBLE PERSON	

# 1 Work performed this reporting period

## 1.1 Technical work performed in this reporting period

### 1.1.1 Radar imaging with synchronized Master and Slave nodes

In this performance period, we have processed data for radar imaging. Data were taken near two buildings 15400 Calhoun Drive. Both data sets were processed using a coherent back projection algorithm. We show one of the outdoor testing scenarios in Figure 1. The other scenario is similar, but taken near the next building over.



Figure 1. Outdoor testing scenario 1.

We show the back projection imaging results in Figure 2 below. We suspect the bright features in the images correspond to the reflection of the nearby building. We are confirming this suspicion with additional experiments at different distances from the building.

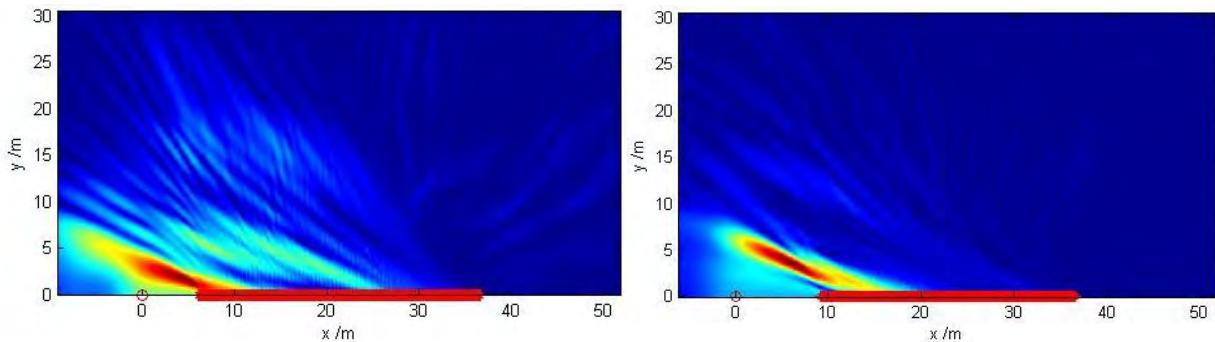
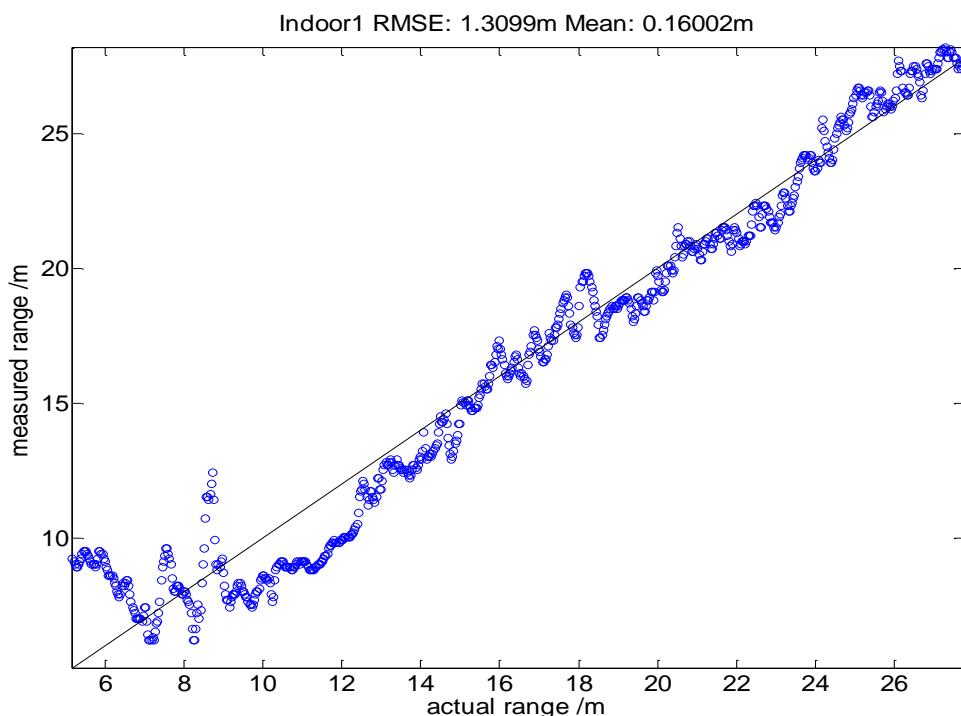


Figure 2. Back projection images for scenarios 1 and 2.

We will also perform radar imaging for a scenario with a human intruder. Initially the intruder will be outside, and near the LOS. We will detect and locate the intruder by image change detection over the course of the experiment. Next, we will try the same with a moving intruder inside the building.

In this reporting period, we have also implemented the beamforming algorithm, and tested it outdoors. We are still analyzing the results, but it appears to correctly point in the direction of the slave, as the direction to the slave changes as the master moves around.

We have also studied the performance of different ranging algorithms for both outdoor and indoor tests. For short range (~200ft) outdoor experiments, we obtain ~60cm accuracy. For indoor experiments, we obtain ~1m accuracy in corridors, and about 6m accuracy for NLOS ranges in an office environment. We show a representative result for a corridor test in Figure 3, below.



**Figure 3. Indoor ranging experiment, office corridor.**

In the next reporting period we are continuing to take data, develop imaging, ranging, and localization algorithms, and prepare for the final demonstration.